

# CITIZEN

## The new dimension in desktop label printing

Half size, half price



### Proven technology

The Citizen CL-S6621 combines the advantages of the well-proven metal Hi-Lift™ mechanism for easy ribbon and media loading with the benefits of an industrial twin-wall ABS housing.

### Compact design

The compact design of the Citizen CL-S6621 makes it the smallest 6 inch printer in the market and the ideal choice for all environments where space is premium.

### Easy operation and media change

Media and ribbons can easily be changed thanks to the Hi-Open™ housing.

## CL-S6621

Label, Wide Format (6 & 8-inch)


### Applications

- Courier
- Logistic / Transport
- Manufacturing
- Warehousing



The new dimension in 6 inch printing

TOMORROW'S PRINTING TODAY

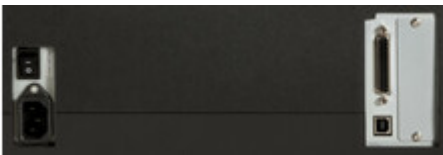

The CL-S6621 features an internal mains power supply which reduces the footprint and avoids cabling issues. At the same time it adds weight and stability to the printer.

### Specifications

|                              |                                                                                                                                                    |
|------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------|
| Model                        | CL-S6621                                                                                                                                           |
| Printing Technology          | Thermal Transfer + Direct Thermal                                                                                                                  |
| Resolution                   | 203 dpi                                                                                                                                            |
| Print Speed (maximum)        | 6 inches per second (150 mm/s)                                                                                                                     |
| Print Width (maximum)        | 6 inches (168 mm)                                                                                                                                  |
| Media Width (min to max)     | 2 to 7 inches (50 to 178 mm)                                                                                                                       |
| Roll Size (max), Core Size   | Inside diameter 5 inches (125 mm) Core size 1 to 3 inches (25.4 to 76 mm)                                                                          |
| Media Thickness (min to max) | 63.5 to 254 µm                                                                                                                                     |
| Media Length (min to max)    | 0.25 to 32 inches (6.35 to 812.8 mm)                                                                                                               |
| Media Sensor                 | Fully adjustable gap, notch, reflective black mark and media low                                                                                   |
| Main Interface               | Dual Interface Serial (RS-232C), USB (version 2.0, full speed)                                                                                     |
| Interface                    | Wireless LAN 802.11b and 802.11g standards, 100 metres, 64/128 bit WEP, WPA, up to 54Mbps, Ethernet (10/100 BaseT), Parallel (IEEE 1284 compliant) |
| Ribbon size                  | 2.9 inches (74mm) maximum outside diameter. 360 metres length. 1 inch (25mm) core                                                                  |
| Ribbon winding & type        | Ink side in or out, switch selectable. Wax, Wax/Resin or Resin Type                                                                                |
| Ribbon system                | ARCP™ automatic ribbon tension adjustment                                                                                                          |
| Mechanism                    | Hi-Lift™ metal mechanism with wide opening head                                                                                                    |
| Control panel                | 4 buttons and 4 LEDs                                                                                                                               |

## CL-S6621

Label, Wide Format (6 & 8-inch)

### Features & Benefits

- Hi-Open™ case for vertical opening, no increase in footprint and safe closing.
- No more unreadable labels - the ARCP™ ribbon control technology assures clear prints.
- Low space requirement - integrated power supply enables clean work station
- Small footprint
- Recyclable packacking
- Basic peeler



All-metal mechanisms for strength and durability

|                                    |                                                                                                                                                                                                                     |
|------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Model</b>                       | <b>CL-S6621</b>                                                                                                                                                                                                     |
| <b>Emulations (Languages)</b>      | Full Datamax® W-Class®, DMX800®, Cross-Emulation™ - automatic switching between Zebra® ZPL-II® and Datamax® I-Class®, DMX400, Zebra® ZPL-II®, BASIC interpreter for data stream processing and ticketing emulations |
| <b>Drivers and software</b>        | Free-of-charge on CD with printer, including support for various platforms                                                                                                                                          |
| <b>Flash (Non-Volatile Memory)</b> | 8 MB total, 1 MB available for user                                                                                                                                                                                 |
| <b>Size (W x D x H) and Weight</b> | 303 x 290 x 273 mm, 7.9 Kgs                                                                                                                                                                                         |
| <b>Cutter</b>                      | Guillotine type, Dealer Installable                                                                                                                                                                                 |
| <b>Warranty</b>                    | 2 years on printer. 6 months or 50 Kms printhead                                                                                                                                                                    |

All product names are trademarks of the respective manufacturers. Zebra®, ZPL and EPL are trademarks of ZIH Corp. Datamax® is a trademark of Datamax-O'Neil Corporation. Designs, specifications and availability are subject to change without notice. Errors and omissions excluded. © Citizen Systems Europe GmbH, V.1.0